



**BBQ Better.**

ASSEMBLY INSTRUCTIONS

DAKOTA EXTENSION TABLE

PRODUCT CODE: **DAKEXTT250L**



Imported by Barbeques Galore Australia

For assistance with assembly please contact your nearest store:


Phone: 1 800 978 555 or

e-mail customer service: [customercare@bbqgalore.com.au](mailto:customercare@bbqgalore.com.au)


## PRE-ASSEMBLY PREPARATION

### Before you start:

1. Choose a clean, level, spacious assembly area. Avoid hard surfaces that may damage the product.
2. Take care when lifting. Assembly should be done as near as possible to the final position.
3. Ensure that you have all required parts for complete assembly.
4. Read the assembly instructions fully and carefully before beginning assembly.
5. Keep unassembled hardware parts and packaging out of reach of small children.
6. Do not over tighten the screws and bolts as this may damage the threads.

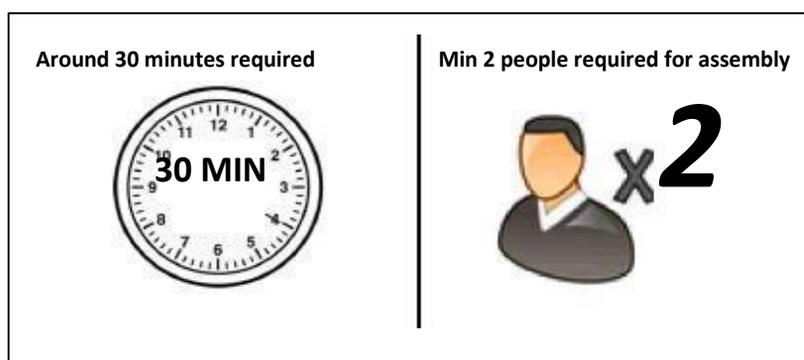

**Do not lift the table by the glass ends!  
Lift only by the support frame.**

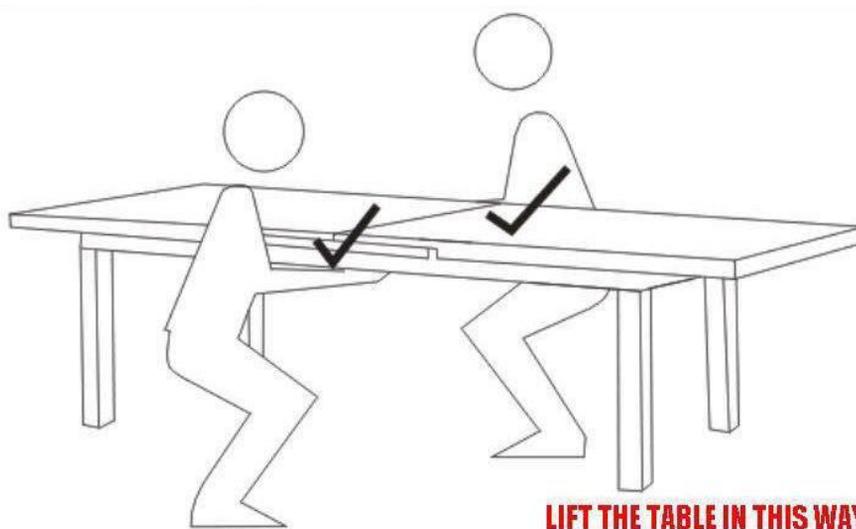

# PARTS LIST

NO.	PICTURE	QTY	
A		1	TABLE TOP
B		4	TABLE LEG
C		4	LONG SCREW
D		4	LEG CAP
E		4	M10 NUT
F		4	SPRING WASHER
G		4	FLAT WASHER
H		1	TOOL

# ASSEMBLY INSTRUCTIONS


## STEP 1: Fit the LONG SCREWS (C)

Important: When moving the table and/or table top, lift and carry by the support frame only, as lifting by the glass pieces may damage the table and/or the mechanism.

With the help of another person carefully place the **TABLE TOP [A]** upside down on a soft clean surface e.g. a blanket.

Then as shown below take one **LONG SCREW [C]** and align the end thread into the threaded hole in one corner of the underside of the **TABLE TOP [A]**, turn the long screw clockwise by hand 2 to 3 full turns to ensure the thread has engaged properly.

Check the thread has properly engaged by gently pulling upwards on the screw. Once the screw is properly engaged, turn the long screw clockwise into the frame another 3 to 4 full turns. Note this screw does not have to touch the bottom of thread hole. Fit the remaining 3 long screws in the same way.

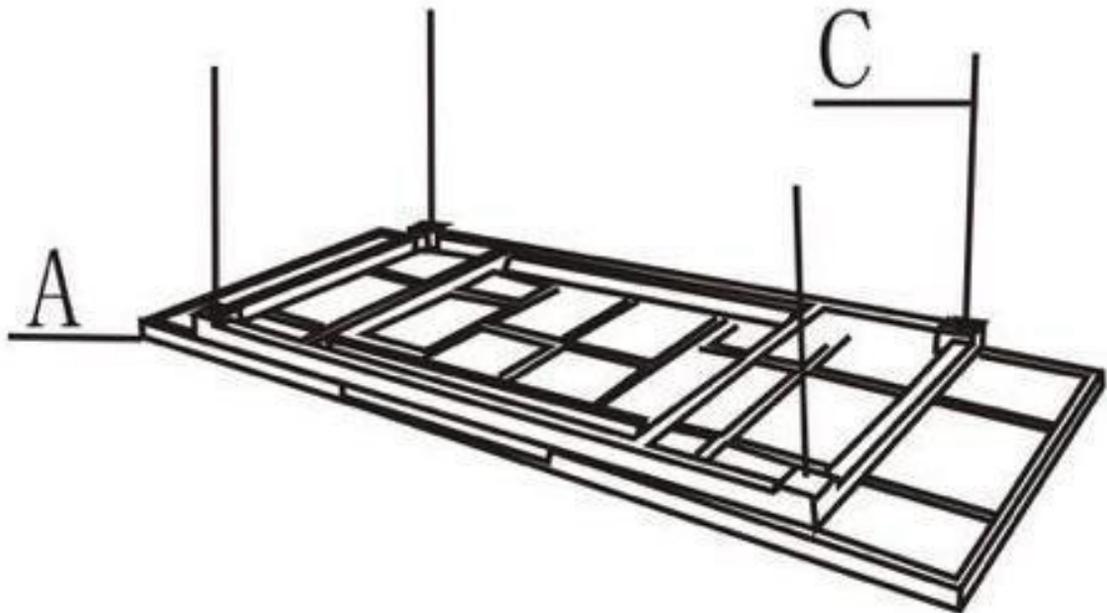

## ASSEMBLY INSTRUCTIONS (continued)

### STEP 2: Fit the Legs (B)


Each leg has one open end and the other end has a flat plate. The open end joins to the table frame.

Take one **TABLE LEG [B]** slide it over a long screw. Align the long screw to come through the hole in the flat plate at the end of the leg.

Once the long screw is through, push the leg over the mounting in the corner of the table frame. Ensure the mounting is square and flat against table frame. Then fit in order: one **FLAT WASHER [G]** then one **SPRING WASHER [F]** and fix with one **M10 NUT [E]** onto the end thread of long screw. Ensure to seat the nut correctly. Tighten the nut by hand clockwise 2 to 3 full turns. Check the thread is properly engaged by winding the nut up and down by hand, it should turn quite easily.

With the nut correctly fitted, use the **TOOL [H]** and tighten the nut until it feels firm. Do not Over Tighten. Once the nut is tightened, fit the **LEG CAP [D]** by aligning all the edges of the cap all into the edges of the leg tube and with the full palm of your hand, push the leg cap down into place.

Repeat for the other three legs.

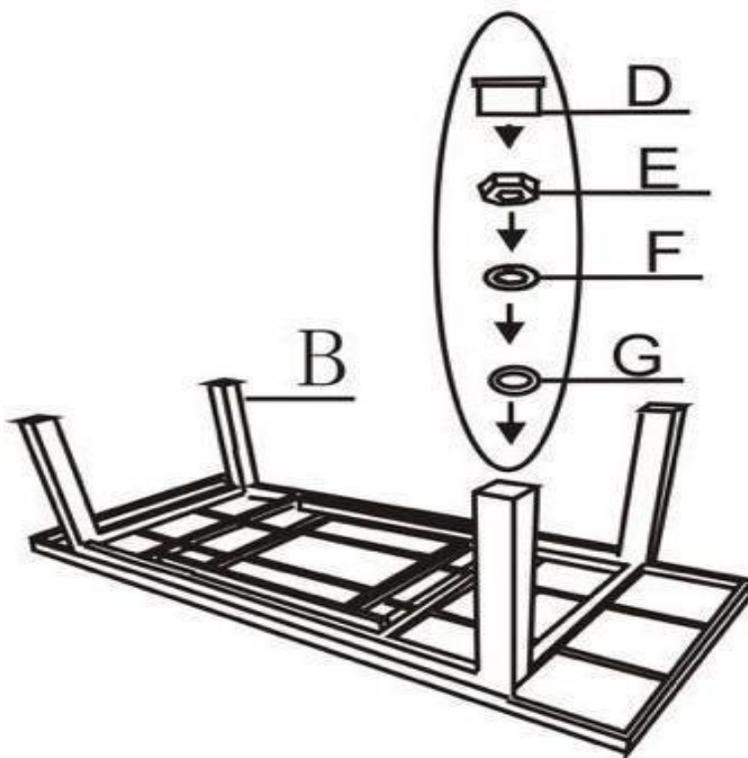

## ASSEMBLY INSTRUCTIONS (continued)

### STEP 3: Turn the table upright (NEEDS TWO PEOPLE):

Once all legs are fitted, with the help of another person, carefully roll the table onto its long side. Make sure the edge is resting on something soft like a blanket or some cushions. With each person anchoring a lower table leg with their foot, carefully roll the table over to its upright position.

Stabilise the table if necessary by adjusting the level screws at the bottom of each leg.

Please read the following operating instruction before use.

**Do not lift the table by the glass ends!**

**Lift only by the support frame.**



## OPERATING INSTRUCTIONS


Note that to open the extension, there are two toggles that are factory set to the locked position.

They are located under the table, past the slide action, one on each side of the table. The first time you will probably need to look under table to locate them. After the first time, you will know where they are.


Each toggle is shaped as shown below, and black in colour.



**To UNLOCK:** pull the toggle away from the frame. You will feel it loosen.

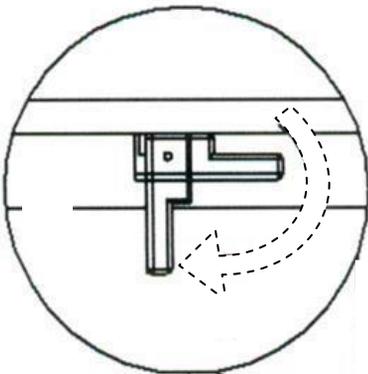


**To LOCK:** Lever the toggle towards the Frame. You will feel it tighten.

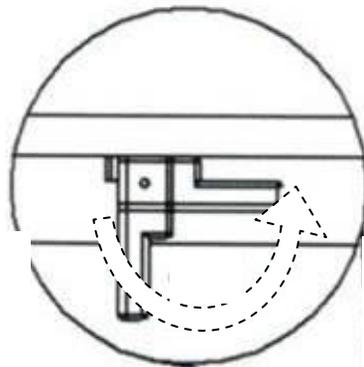

## OPERATING INSTRUCTIONS (continued)

Once both toggles are in the unlocked (down) down position you can now open and close the extension as desired.

To open the extension: Stand at one short end of the table. With two hands, one on each long side of the table, pull the table top back towards you and step slowly backwards.

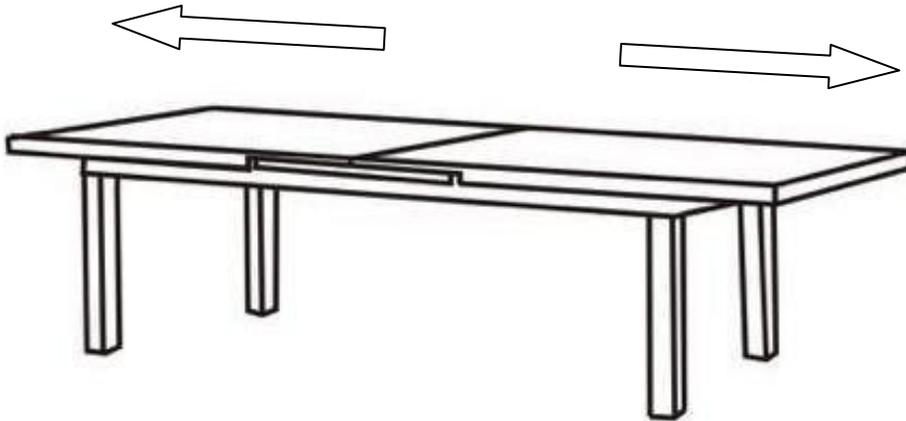

Both sections of the table top are joined by a pulley system, so both ends open together and one person alone can do this if required. It is a bit easier with two people working together, one at each end.

The auto-riser function will raise the extension. Keep opening the table until all sections of the table are level. Once all of the table is extended and level, simply push the table top back towards the middle to align all the sections together. Lock the toggles to prevent unwanted movement of the tops.

## OPERATING INSTRUCTIONS (continued)

To close the extension, first unlock both toggles then stand at one short end of the table. With two hands, one on each long side of the table, gently pull the table top back towards you a little.

The extension will start to lower. Continue opening the gap until the extension has lowered enough to slide table top back over the extension.

Note that if you continue to pull back too far, then the extension piece will rise again.

When satisfied that the extension piece is in correct position, slowly push the table top forward to slowly slide the two table tops together. Continue until the gap is closed, then lock the toggles.



It's a good idea to practice this few times to get to know how it works.

**Keep these instructions handy for anyone new to understand how to use the extension.**

## CARE AND MAINTENANCE

A little care and maintenance will help extend the life and maintain the appearance of your table. When it is not in use, protection from direct exposure to the elements, falling tree sap and pollen, bird droppings etc. will make a significant difference to the appearance of your table.

### **DAKOTA**

#### **Construction**

Frame: Powder coated aluminium

Top: Tempered Glass

#### **Powder Coated Aluminium**

Powder coating is similar to a painted finish, the metal is coated with a paint powder then is baked in a kiln to bond and harden the coating onto the metal.

To clean, use a bucket of warm water with a soft clean cloth or sponge, gently clean the surface in one direction, avoid excessive rubbing as this will wear down the finish. Ensure to pat dry with a soft absorbent cloth as water droplets will leave a mark on the finish.

#### **Glass table top**

- If the glass is chipped or broken, stop using the product and consult your place of purchase.
- Do not drop, drag or strike the glass.
- Do not sit or stand upon the glass surfaces.
- Do not place very hot or cold items on the glass unless adequately thick table mats are used to prevent such items coming in contact with the glass.
- Do not place very heavy objects on glass.
- Avoid scratching the glass or using it as a chopping surface.
- Do not strike the glass with hard or pointed items.
- When cleaning the glass panels, use a damp cloth with washing up liquid or soft soap if necessary. Do not use washing powders or any other substances containing abrasives that may potentially scratch the glass.