Fireplaces to suit every home

Warm up to Winter Living

We've been transforming houses across the country into warm, comfy homes for over 35 years. So we understand that buying a wood heater can be a big decision.

Our heating experts are dedicated to helping you find the perfect heater to suit your needs. We have some of the cleanest burning models on the market — burning up to three times cleaner than the national standard for emissions — and all wood heaters come with a warranty of up to 15 years. Plus, our outstanding after-sales service makes sure you're never left in the cold.

Cleaner burning heaters are better for the environment

The national standard for emissions is 1.5g/kg. We're proud to share that our best wood heaters emit under 0.6g/kg. Discover our cleaner heaters identified by the Burnwise Graph:

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	Australian Standard	>60%
PARTICLE EMISSIONS	Australian Standard	<1.5g/kg

How to find the perfect heater for your home

Generally, wood heaters fall into two styles:

Freestanding

If you don't have an existing fireplace, a freestanding wood heater is ideal. It can create a cosy focal point for your living space, with very little structural work involved in the installation.

Built-In

Insert
If you do have an existing fireplace, it's easy to upgrade with our range of insert heaters.

Zero Clearance
If you don't have an existing fireplace, a Zero Clearance heater can be inserted into any blank wall with minimal structural impact.

Whether your choice is led by design or performance, there are several important factors to consider when choosing your wood heater:

|	
Coverage	The size of the area the heater will warm
Heat Output	The amount of heat generated
Burn Time	How long the heater will take to burn one load of logs on low
Efficiency	How effectively the heater burns the wood
Emissions	The volume of waste emitted from the heater
Maximum Log Size	The largest log size that will fit in the heater
Construction	The thickness of the firebox
Firebox Size	The larger the firebox, the greater the coverage
Fan	The fan helps circulate heat

For more detailed specifications and installation information for each of our wood heaters, see pages 13-15.

Traditional Simplicity

Unassuming classics, homely and down to earth.
Model Shown: Saxon Merbau
See page 4
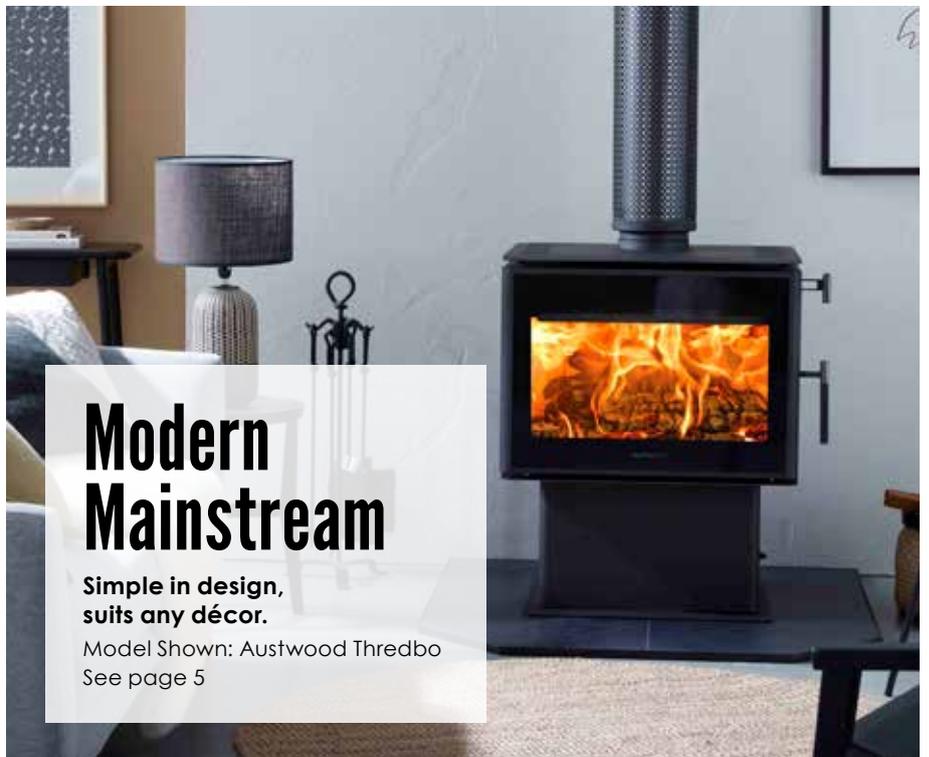
Modern Mainstream

Simple in design, suits any décor.

Model Shown: Austwood Thredbo
See page 5

What's your style?

Do you like that functional modern look, or prefer a touch of yesteryear charm?

Maybe you love clean minimalist lines or find homely and traditional is more your thing.

We have wood heaters in all styles and sizes, so have a look through and find your favourite.

Rustic Charm

Hints of country chic styling for a cosy cottage feel.

Model Shown:
Maxiheat Prime 150
See page 10

Sleek Design

Sleek European style to compliment modern interiors.

Model Shown:
Norseman Nevada
See page 7

Saxon

The range of Saxon heaters is an evolution of the traditional style wood heater. This efficient and environmentally friendly range burns up to three times cleaner than the national standard for emissions.

On the inside, the Hi-Tech Refractory baffle pushes the heat back into the fire for a cleaner, more efficient burn.

The time-delay fan starts 20 minutes after the heater door is closed, ensuring only hot air is being amplified into the room.

Built tough to last, the ceramic glass door is self-cleaning and the 8mm steel firebox eliminates the need for firebricks and comes with a **15 year firebox warranty**.

Blackwood with Wood Storage

SXBW22WSMB

875H x 691W x 566D

Coverage	up to 300m²	Max Log Size	410mm
Peak Heat Output	15.5kW	Construction	8mm
Burn Time	Up to 8hrs	Fire Box Size	0.08m3
Baffle	25mm thick Hi-Tech Refractory	Fan	3 speed time delay

BurnWise An initiative of the Australian Home Heating Association

EFFICIENCY	This model	67%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.5 g/kg
	Australian Standard	<1.5g/kg

Merbau

SXMER22MB

800H x 626W x 516D
– Perfect for smaller spaces

Coverage	**Up to 250m²**	Max Log Size	**380mm**	Baffle	**25mm thick Hi-Tech Refractory**
Peak Heat Output	**10.4kW**	Construction	**8mm thick steel**	Fan	**3 speed time delay**
Burn Time	**Up to 7hrs**	Fire Box Size	**0.07m³**		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	61%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	1.0g/kg
	Australian Standard	<1.5g/kg

Blackwood

SXBW22MB

875H x 691W x 566D
– Heats a large family home with ease

Coverage	**Up to 300m²**	Max Log Size	**410mm**	Baffle	**25mm thick Hi-Tech Refractory**
Peak Heat Output	**15.5kW**	Construction	**8mm thick steel**	Fan	**3 speed time delay**
Burn Time	**Up to 8hrs**	Fire Box Size	**0.08m³**		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	67%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.5 g/kg
	Australian Standard	<1.5g/kg

Mahogany

SXMH22MB

920H x 766W x 616D
–Ideal for large space

Coverage	**Up to 350m²**	Max Log Size	**460mm**	Baffle	**25mm thick Hi-Tech Refractory**
Peak Heat Output	**19.6kW**	Construction	**8mm thick steel**	Fan	**3 speed time delay**
Burn Time	**Up to 10hrs**	Fire Box Size	**0.1m³**		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	63%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	1.1g/kg
	Australian Standard	<1.5g/kg

Blackwood Insert

SXBWIN22MB

Fascia: 930W x 708H x 470D
Cabinet: 635W x 605H x 470D
Zero Clearance Box: 817H x 838W x 578D
The prefect heater for medium sized spaces

Coverage	**Up to 280m²**	Max Log Size	**410mm**	Baffle	**25mm thick Hi-Tech Refractory**
Peak Heat Output	**14.7kW**	Construction	**8mm thick steel**	Fan	**3 speed time delay**
Burn Time	**Up to 7.5hrs**	Fire Box Size	**0.08m³**		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	62%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.5g/kg
	Australian Standard	<1.5g/kg

AustWood

Austwood

Modern and sleek in design, the Austwood is sure to become the centrepiece in any home.

Includes a wide viewing glass to enjoy the fire from any position in the room, 3 speed fan with and **10 year firebox warranty**.

MADE IN AUSTRALIA

Thredbo

AWTHR23MB

840H X 660W X 560D
– Perfect for medium sized spaces

Coverage	**Up to 300m²**	Max Log Size	**370mm**
Peak Heat Output	**12.3kW**	Construction	**6mm**
Burn Time	**Up to 8.5hrs**	Fire Box Size	**0.07m³**
Baffle	**25mm thick Hi-Tech**	Fan	**3 speed factory fitted**

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	75%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.6g/kg
	Australian Standard	<1.5g/kg

Hotham

AWHOTH23MB

770H X 600W X 510D
– Perfect for smaller spaces

Coverage	**Up to 200m²**	Max Log Size	**320mm**	Baffle	**25mm thick Hi-Tech Refractory**
Peak Heat Output	**12kW**	Construction	**6mm**	Fan	**3 speed factory fitted**
Burn Time	**Up to 7hrs**	Fire Box Size	**0.04m³**		

Burn Wise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	69%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.7 g/kg
	Australian Standard	<1.5g/kg

Perisher

AWPER23MB

910H X 760W X 560D
– Heats a large family home with ease

Coverage	**Up to 320m²**	Max Log Size	**370mm**	Baffle	**25mm thick Hi-Tech Refractory**
Peak Heat Output	**16.6kW**	Construction	**6mm**	Fan	**3 speed factory fitted**
Burn Time	**Up to 9.5hrs**	Fire Box Size	**0.1m³**		

Burn Wise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	64%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.7 g/kg
	Australian Standard	<1.5g/kg

Pictured: Hotham AWHOTH23MB

NorsemaN

Norseman

Offering a wide variety of styles, the Norseman range has been designed to fit comfortably into any decor, traditional or contemporary.

Come instore and we can help you find the right style for your home, with every model backed by a **10 year firebox warranty.**

## Aura MKII on Wood Stacker

GHAURA25MBWS
Heater 910H x 981W x 496D
Bench model 1180W
- 10 year firebox warranty
- revolutionary Schott Night Flame (TM) Glass

Coverage	**Up to 300m²**	Max Log Size	**330-700mm**
Peak Heat Output	**14.1kW**	Construction	**5mm**
Burn Time	**9hrs+**	Fire Box Size	**0.07m³**
Baffle	**25mm thick Hi-Tech Refractory**	Fan	**Twin barrel 3 speed fans**

BurnWise
An initiative of the Australian Home Heating Association

EFFICIENCY	This model	65%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.7 g/kg
	Australian Standard	<1.5g/kg

GHAURA25MBA

GHAURA25MBBE

Forester

GHF16K

785H x 560W x 525D
– Perfect for smaller spaces

Coverage	Up to 180m²	Max Log Size	370mm	Baffle	6mm thick steel
Peak Heat Output	13.3kW	Construction	6mm		
Burn Time	Up to 7.5hrs	Fire Box Size	0.06m³		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	69%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	1.2 g/kg
	Australian Standard	<1.5g/kg

Nevada MKII

GHNV19K

790H x 677W x 532D
– Ideal for small to medium spaces

Coverage	Up to 200m²	Max Log Size	320mm	Baffle	8mm thick steel
Peak Heat Output	10.9kW	Construction	6mm	Fan	3 speed factory fitted
Burn Time	Up to 8hrs	Fire Box Size	0.06m³		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	72%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	1.g/kg
	Australian Standard	<1.5g/kg

Legend MKII

GHLE19K

840H x 737W x 582D
– Perfect for large spaces

Coverage	Up to 300m²	Max Log Size	370mm	Baffle	8mm thick steel
Peak Heat Output	17.3kW	Construction	6mm	Fan	3 speed factory fitted
Burn Time	Up to 8.5hrs	Fire Box Size	0.08m³		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	76%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.7g/kg
	Australian Standard	<1.5g/kg

Aura Insert

GHAURAIN17K

Fascia 591H x 1021W
Cabinet 651H x 1071W x 550D
– 10 year firebox warranty
- Lined with Hi-Tech Refractory for optimum efficiency

Coverage	Up to 280m²	Max Log Size	300-700mm	Baffle	25mm thick Hi-Tech Refractory
Peak Heat Output	17.3kW	Construction	5mm	Fan	2x single barrel 3 speed fans
Burn Time	Up to 8hrs	Fire Box Size	0.06m³		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	60%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.7 g/kg
	Australian Standard	<1.5g/kg

Maxiheat

Add warmth to your home with our value range of Maxiheat wood heaters.

This quality range includes both freestanding and insert models.

Add a focal point to your living space with our Prime 150 with its rustic charm or update an existing fire place with the traditional look of the Nomad insert.

Nomad Insert

MXNOIN19K

FASCIA: 675H x 815W mm
CABINET: 599H x 645W x 449D mm
Zero Clearance Box: 817H x 838W x 578D mm
Zero Clearance compatible
 – 10 year firebox warranty

Coverage	**up to 280m²**	Construction	**6mm**
Peak Heat Output	**13kW**	Fire Box Size	**0.1m³**
Burn Time	**Up to 7hrs**	Max Log Size	**370mm**
Baffle	**8mm steel**	Fan	**3 speed factory fitted**

BurnWise — An initiative of the Australian Home Heating Association

	This model	
EFFICIENCY	This model	66%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.95 g/kg
	Australian Standard	<1.5g/kg

Gen II

GHGEN2KITL/P

653H x 628W x 478D
- Customise with either a leg (as pictured) or pedestal base

Coverage	**Up to 200m²**	Max Log Size	**270mm**	Baffle	**6mm thick steel**
Peak Heat Output	**11.4kW**	Construction	**6mm**	Fan	**3 speed**
Burn Time	**Up to 8hrs**	Fire Box Size	**0.04m³**		

BurnWise — An initiative of the Australian Home Heating Association

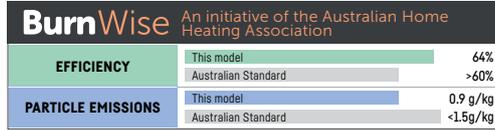|	This model	
EFFICIENCY	This model	63%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	1.0g/kg
	Australian Standard	<1.5g/kg

Prime 150

MXPRM150

649H x 548D x 595W mm
– Radiant heater
– 5 year firebox warranty

Coverage	Up to 150m²	Max Log Size	370mm	Baffle	8mm thick steel
Peak Heat Output	16.5kW	Construction	6mm		
Burn Time	Up to 6hrs	Fire Box Size	0.06m³		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	64%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.9 g/kg
	Australian Standard	<1.5g/kg

Prime 200C

MXPRM200C

720H x 587W x 495D mm
– Convection heater
– 10 year firebox warranty

Coverage	Up to 200m²	Max Log Size	370mm	Baffle	8mm steel
Peak Heat Output	11.0kW	Construction	5mm	Fan	3 speed factory fitted
Burn Time	Up to 7hrs	Fire Box Size	0.06m³		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	68%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.9 g/kg
	Australian Standard	<1.5g/kg
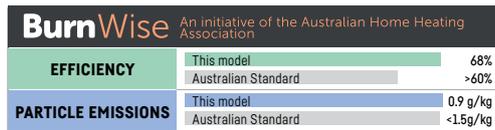
Geo

GEO18MB

722H x 960W x 496D
– Landscape heater
– 10 year firebox warranty

Coverage	Up to 250m²	Max Log Size	295mm	Baffle	25mm think Hi-Tech Refractory
Peak Heat Output	14.3kW	Construction	5mm		
Burn Time	Up to 7hrs	Fire Box Size	0.06m³		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	63%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.5g/kg
	Australian Standard	<1.5g/kg

Modena

MXMOD20MB

1102H x 608W x 449D
– Radiant heater
– 10 year firebox warranty

Coverage	Up to 180m²	Max Log Size	295mm	Baffle	25mm think Hi-Tech Refractory
Peak Heat Output	10.3kW	Construction	5mm		
Burn Time	Up to 6hrs	Fire Box Size	0.06m³		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	73%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	1.1g/kg
	Australian Standard	<1.5g/kg

Clean Air

Clean Air heaters offer a state-of-the-art firebox design to give you an extremely long burn time for those cold winter nights. The exclusive heat exchange activation tubes run directly through the firebox, to extract more heat from the fire.

These heat exchange tubes are unique to Clean Air and not found on any other wood heater. This is just one reason why Clean Air is one of the most advanced wood heaters in Australia.

Medium Insert

CAISM19MB

Coverage	**Up to 280m²**	Max Log Size	**390mm**	Baffle	**25mm Hi-tech refractory baffle**
Peak Heat Output	**12.5kW**	Construction	**6mm**	Fan	**3 speed remote controlled fan**
Burn Time	**Up to 9hrs**	Fire Box Size	**0.07m³**		

BurnWise An initiative of the Australian Home Heating Association

EFFICIENCY	This model	66%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	1.0g/kg
	Australian Standard	<0.8g/kg

Medium Console

CACM19MB

865H x 759W x 615D mm

Coverage	**Up to 300m²**	Max Log Size	**380mm**	Baffle	**25mm thick Hi-Tech Refractory baffle**
Peak Heat Output	**14.2kW**	Construction	**6mm steel firebox with refractory lining**	Fan	**3 speed remote controlled fan**
Burn Time	**Up to 10hrs**	Fire Box Size	**0.07m³**		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	70%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.85g/kg
	Australian Standard	<1.5g/kg

Large Console

CACL19MB

915H x 859W x 700D mm

Coverage	**Up to 350m²**	Max Log Size	**420mm**	Baffle	**25mm thick Hi-Tech Refractory baffle**
Peak Heat Output	**19.2kW**	Construction	**6mm steel firebox with refractory lining**	Fan	**3 speed remote controlled fan**
Burn Time	**Up to 12hrs**	Fire Box Size	**0.1m³**		

BurnWise	An initiative of the Australian Home Heating Association	
EFFICIENCY	This model	70%
	Australian Standard	>60%
PARTICLE EMISSIONS	This model	0.85g/kg
	Australian Standard	<1.5g/kg

* All Clean Air heaters come in a high temperature Metallic Black finish

Pictured: CACM19MB

Cadel

Developed and manufactured in Italy, the award winning Hublot Pellet Heater delivered warmth and coziness of real flame heating all with the ease of push button control.

Operated with Wifi control from your phone with an easy to use control panel, the Hublot is the stylish alternative to traditional wood heaters.

Hublot

GDBLF50
749H x 605W x 614D (mm)

Colour/Finish	**Black**	Controls	**Wifi**
Peak Heat Output	**6kW**	Burn time	**Up to 12hrs**
Coverage	**150m³**	Fuel type	**Pellet**

Adjustable length Flues

45° bend

Cowl

Adaptor

Insulated Flue

Introducing the Maxiheat RS Flue Kit. Standing for Room Sealed, the Maxiheat RS Flue Kit fully Insulated from the heater to the cowl ensures a smarter fluing solution engineered for performance. Along with this high-quality insulation, all Maxiheat RS Flue Kits are fully room sealed, ensuring significantly less loss of heat than traditional flue kits effectively increasing the performance of any wood heater installation. Featuring a Twist-Lock assembly process, the ease of installation is also at front of mind. With full room-sealed operation, high-performance insulation, and a secure twist-lock system, The Maxiheat RS Flue Kit delivers confidence, compliance, and efficiency in one streamlined package

Brand	Model	Flue Configuration	Rear Wall Clearance	Side Wall Clearance	Corner Clearance
SAXON	Merbau	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	150	300	50
	Blackwood (Pedestal and Wood Storage)	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	100	300	50
	Mahogany	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	125	400	50
AUSTWOOD	Hotham	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	150	300	100
	Thredbo	Maxiheat Insulated Room Sealed Flue Kit [MXFKRS3MB]	150	350	125
	Perisher	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	220	400	175
NORSEMAN	Forester	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	250	800	525
	Nevada MKII	Maxiheat Insulated Room Sealed Flue Kit [MXFKRS3MB]	200	325	100
	Legend MKII	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	200	325	100
	Aura MKII	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	300	400	100
MAXIHEAT	Gen II	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	130	350	55
	Modena	Maxiheat Insulated Room Sealed Flue Kit [MXFKRS3MB]	250	425	275
	Geo	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	250	350	150
	Prime 200C	Maxiheat Insulated Room Sealed Flue Kit [MXFKRS3MB]	150	500	125
	Prime 150	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	420	640	400
CLEAN AIR	Medium Console	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	150	550	200
	Large Console	Maxiheat Insulated Room Sealed Flue Kit With Flue Shield [MXFKRS3MBWS]	250	650	200

Accessories

Childguards

Standard freestanding childguard bars (Shown)
Standard 110W x 110D x 80H cm
Large 125W x 125Dx 80H cm
Available in bars or mesh

Also available:
Corner childguard
79W x 75D x 80H cm
Available in bars or mesh

Insert childguard
125W x 30D x 80H cm
Available in mesh

Hearths

Tiled Hearth
MXTH1BLK2/GRY/WGB
1 x 1m | 1.2 x 1.2 x 0.02m
Available in Gloss Black & Matt Grey

Tiled Insert Hearth
MXTHINSBLK/GRY
1.2 x 0.6 x 0.056m
Available in Gloss Black, Matt Grey

Tiled Corner Hearth
MXTH12BLK2/GRY/WGB
1.2 x 1.2 x 0.02m
Available in Gloss Black & Matt Grey

Tiled Square Hearth
MXTHSQ12BLK/GRY
1.2 x 1.2 x .04m
Available in Gloss Black, Matt Grey

Full Slab Hearth With Chamfered Edge
1.2 x 1.2 x 0.02m
Available in Gloss Black
composite stone

Tool Sets and Fire Rug

Wool Fire Rug
MXFIRERUG

A.	B.	C.

A.	**4 Piece Toolset** MXFTS4PE
B.	**4 Piece Loop Toolset** MXFTS4PL
C.	**4 Piece Toolset With Wood Handles** MXFTS4PW

Cleaning and Accessories

Fire Brush Cleaning Kit With Extensions
BSWPP06

Maxiheat Heatproof Leather Fire Gloves
MXFIREGLV

Maxiheat Radiant Fan
MXRADFAN

Log Holders

Curved Log Holder
MXLOGR

Two Tier Log Holder With 4 Piece Toolset
MXLOGR2T

Wood Ring Log Holder with Ashpan
MXLOGRING

Child Guards & Firescreens
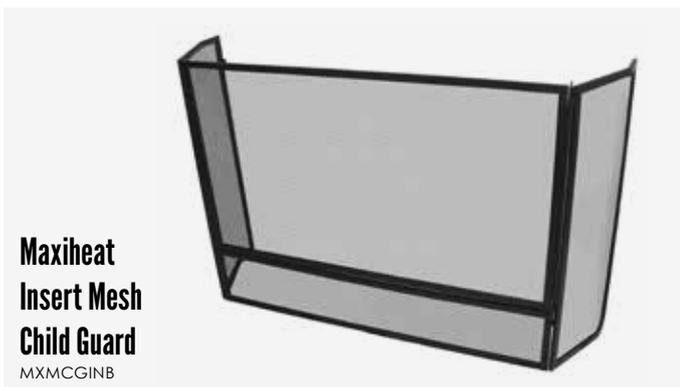
Maxiheat Insert Mesh Child Guard
MXMCGINB
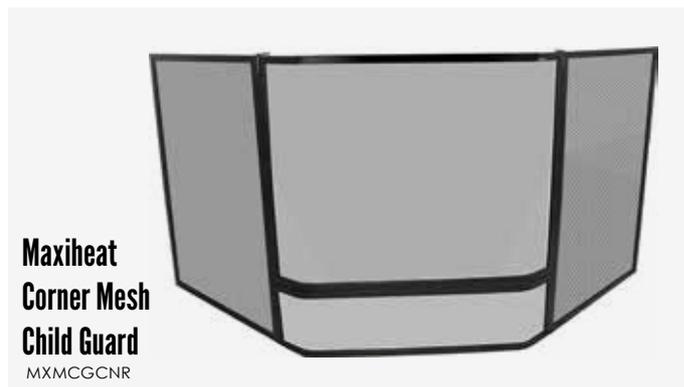
Maxiheat Corner Mesh Child Guard
MXMCGCNR

Maxiheat Freestanding Mesh Child Guard
MXMCG110/MXMCG125
Available in two sizes

Maxiheat 3 Panel Curved Firescreen
MXFS65752

Installation

There are several important factors to consider when you're planning to install a wood heater:

– Heater installation dimensions
– Hearth clearances
– The position of the heater
– The installation of the flue system, and where the flue will exit the roof, as it must be sealed

It's important to use a qualified professional for installation as they can offer valuable advice and insights as well as identify any potential problems.

Always refer to instruction manual or website (www.barbequesgalore.com.au) for additional information, including minimal clearances and hearth specifications.

Model shown: Austwood Thredbo Insert

Brand	Model	CLEARANCES (mm)						
		Bottom of heater above the floor (mm)	Maxiheat Insert Hearth (MXTHINSGRY/BLK) or equivalent 600D x 1045w x 56H (mm)	Masonry (Brick) Hearth	Floor Protector	Rear of Fascia to flue centre	Top Clearance to Mantle from top of fascia	Side Clearance to Mantle from side of fascia
Saxon	Blackwood	0	✓			324	560	35
		110	✓	✓ (400D X 930WX 110H)				
		200	✓	✓ (400D X 930WX 110H)	✓ (550D X 930w X 56H)			
		300	✓	✓ (300D X 930WX 110H)	✓ (300D X 930W X 15H)			
Maxiheat	Nomad	0	✓			301	600	50
		110	✓	✓ (450D X 1045WX 110H)				
		200	✓	✓ (450D X 1045WX 110H)	✓ (500D X 1045W X 15H)			

Zero Clearance Heater

Maxiheat Zero Clearance Box

If you like the look of an insert fireplace but don't have an existing brick chimney, use the Maxiheat Zero Clearance box with any of our compatible insert heaters to achieve the same look.
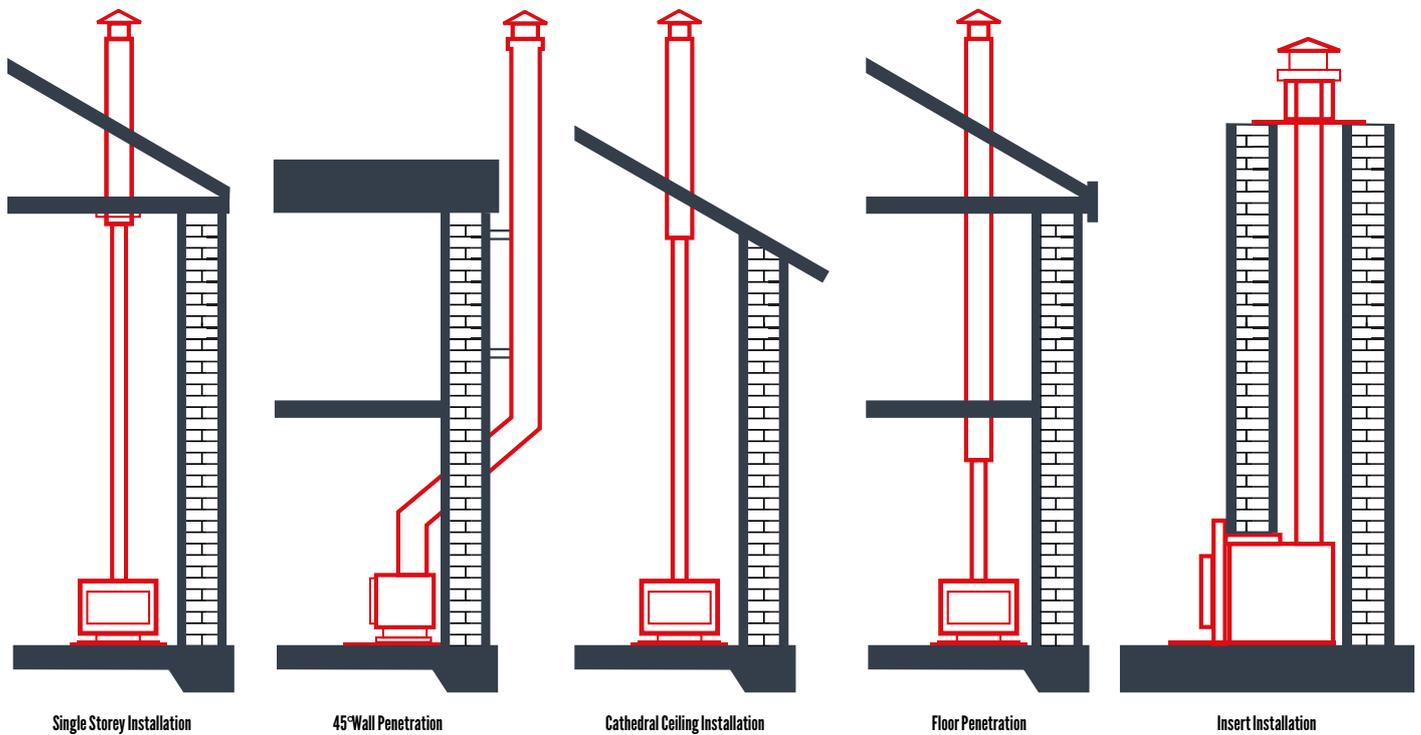
No major structural work required!

Air vents need openings of no less than 10,000mm² at the base and top of the zero clearance enclosure.

* Drawing is a guide only

Flue Installation

Below are the most common types of heater and flue installations.

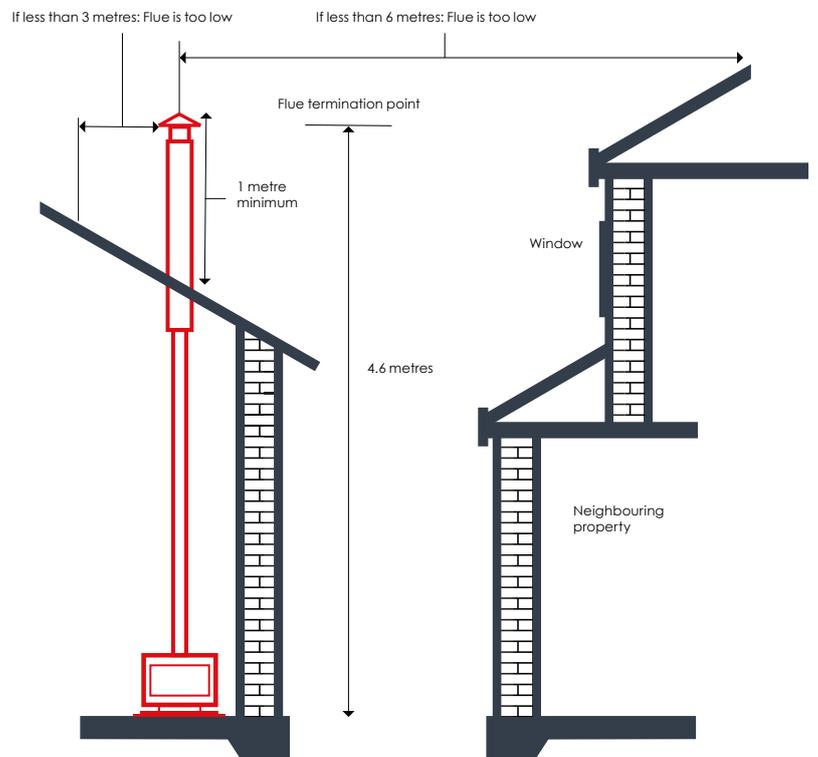| Single Storey Installation | 45°Wall Penetration | Cathedral Ceiling Installation | Floor Penetration | Insert Installation |

Correct flue height

Most wood heater installations are completed trouble free.

But with some houses, simple extra measures need to be taken to ensure the flue is the correct height to avoid the hassle of downdrafts or smoke blowing into neighbouring properties.
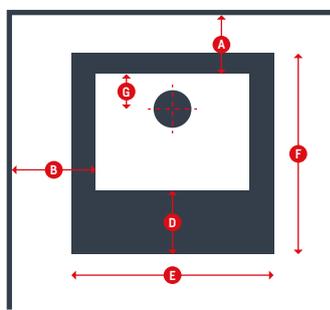
The minimum height for a wood heater installation is 4.6 metres from the bottom of the heater to the top of the flue.

Sometimes the flue will need to be extended because the flue must extend a minimum of one metre from where it exits the roof.

Keep in mind that all wood heater installations must meet the latest version of the Australian installation standards, AS/NZS 2918.

If less than 3 metres: Flue is too low
If less than 6 metres: Flue is too low
Flue termination point
1 metre minimum
4.6 metres
Window
Neighbouring property

Freestander Clearance Specification

Standard Installation
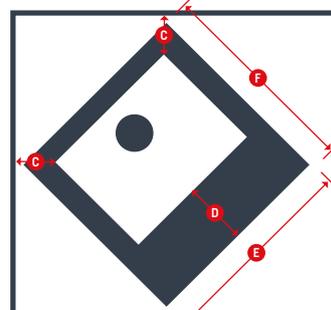
Corner Installation

Brand	Model	Flue Configuration	Clearances (mm)				Hearth Min. Dimensions (mm		Rear to Centre Flue (mm)	Recommended Maxiheat Hearth
			Rear Wall (A)	Side Wall (B)	Corner (C)	Hearth Front (D)	Width (E)	Depth (F)	(G)	
Saxon	Merbau	Maxiheat Decromesh Default Flue Kit with Inner Shield (MXFKDEC3MB + MXRSISS2)	150	300	50	300	860	790	183	MXTH1GRY/BLK2
		Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	100	250	50	300	860	790		
	Blackwood (Pedestal and Wood Storage)	Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	100	300	50	300	840	925	183	MXTH1GRY/BLK2
		Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	125	300	50	300	840	925		
	Mahogany	Maxiheat Decromesh Default Flue Kit with Inner Shield (MXFKDEC3MB + MXRSISS2)	125	400	50	300	1000	890	183	MXTH12GRY/BLK2 or MXFSH12DBLK
		Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	125	400	50	300	1000	890		
Austwood	Hotham	Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	150	300	100	300	875	785	182	MXTH1GRY/BLK2
		Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	125	300	100	300	875	785		
	Thredbo	Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	150	350	125	300	935	835	182	MXTH1GRY/BLK2
		Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	75	350	100	300	935	835		
	Perisher	Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	220	400	175	300	1035	835	182	MXTH12GRY/BLK2 or MXFSH12DBLK
		Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	220	400	150	300	1035	835		
Norseman	Forester	Maxiheat Standard Default Stainless Kit (MXFKT3SS)	475	800	525	300	850	850	175	MXTH12GRY/BLK2
		Maxiheat Standard Default Stainless Kit with Single Shield (MXFKT3SS + MXRSISS2)	250	800	525	300	850	850		
		Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	250	800	525	300	850	850		
		Maxiheat Standard Default Stainless Kit with Double Shield (MXFKT3SS + MXRSISS2 + MXRSOB2)	150	800	525	300	850	850		MXTH1GRY/BLK2
		Maxiheat Standard Default Black Painted Kit with Double Shield (MXFKT3MB)	150	800	525	300	850	850		
	Nevada MKII	Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	250	325	100	300	885	799	199	MXTH12GRY/BLK2
		Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	200	325	100	300	885	799		MXTH1GRY/BLK2
		Maxiheat Standard Default Black Painted Kit with Double Shield (MXFKT3MB)	200	450	100	300	885	799		
	Legend MKII	Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	250	325	100	300	945	849	199	MXTH12GRY/BLK2 or MXFSH12DBLK
		Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	200	325	100	300	945	849		
		Maxiheat Standard Default Black Painted Kit with Double Shield (MXFKT3MB)	200	325	70	300	945	849		
	Aura MKII	Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	400	400	100	600	1150	1096	179	MXTH12GRY/BLK2 + MXTH300GRY/BLK2
		Maxiheat Non-Perforated Flue Kit with Inner Shield & Additional Outer Shield (MXFKSD3MB + MXRSOB2)	300	400	100	600	1150	1096	179	
		Maxiheat Standard Default Black Painted Kit with Double Shield (MXFKT3MB)	250	400	100	600	1150	1096	179	
Maxiheat	Gen II	Maxiheat Decromesh Default Flue Kit with Inner Shield (MXFKDEC3MB + MXRSISS2)	130	350	55	Ped: 545 Legs: 600	910	1100	158	MXTH12GRY/BLK2
		Maxiheat Standard Default Black Painted Kit with Double Shield (MXFKT3MB)	50	375	205	Ped: 545 Legs: 600	910	1100		
	Modena	Maxiheat Standard Default Flue Kit or Default Black Kit (MXFKT3SS or MXFKT3MB)	250	425	275	300	800	900	234	MXTH1GRY/BLK2
		Maxiheat Standard Default Black Painted Kit with Double Shield (MXFKT3MB)	75	400	100	300	800	900		
	Geo	Maxiheat Standard Default Black Painted Kit with Double Shield (MXFKT3MB)	250	350	150	400	1220	1220	177	MXTHSQ12GRY/BLK
		Maxiheat Decromesh Default Flue Kit with Inner & Outer Shield (MXFKDEC3MB + MXRSISS2 + MXRSOB2)	200	350	150	400	1220	1220		
	Prime 200C	Maxiheat Standard Default Black Painted Kit with Double Shield (MXFKT3MB)	150	500	125	300	873	780	181	MXTH1GRY/BLK2
		Maxiheat Decromesh Default Flue Kit (MXFKDEC3MB)	150	500	125	300	873	780		
		Maxiheat Non-Perforated Flue Kit with Inner Shield (MXFKSD3MB)	100	400	125	300	873	780		
	Prime 150	Maxiheat Standard Default Black Painted Kit with Double Shield (MXFKT3MB)	350	700	475	385	830	870	151	MXTH12GRY/BLK2 or MXFSH12DBLK
		Maxiheat Decromesh Default Flue Kit with Inner Shield (MXFKDEC3MB + MXRSISS2)	350	700	475	385	830	870		
Clean Air	Medium Console	Maxiheat Decromesh Default Flue Kit with inner and Outer Shield (MXFKDEC3MB + MXRISS2 + MXRSOB2)	150	550	200	300	960	878	230	MXTH12GRY/BLK2 or MXFSH12DBLK
		Maxiheat Non-Perforated Flue Kit with inner and Outer Shield (MXFKDEC3MB + MXRISS2 + MXRSOB2)	150	550	200	300	960	878		
	Large Console	Maxiheat Decromesh Default Flue Kit with inner and Outer Shield (MXFKDEC3MB + MXRISS2 + MXRSOB2)	200	650	225	300	1060	927	230	MXTH12GRY/BLK2 or MXFSH12DBLK
		Maxiheat Non-Perforated Flue Kit with inner and Outer Shield (MXFKDEC3MB + MXRISS2 + MXRSOB2)	250	650	200	300	1060	927		

All measurements are in mm unless otherwise stated. Refer to the individual product installation manual for final specifications.

Minimum Hearth Dimensions: These are minimum measurements required to meet the Australian Standard AS/NZS2918 (Note: will not cover floor from rear of heater to wall)

**Recommended Hearth: Recommended hearth to ensure all requirements are met including covering the floor for rear of heater to wall.*